
2 Mega Pixel IP Vandal Camera



Features

- 2MP @30fps, H.265
- Micro SD Card Slot
- 3Axis
- 3D DNR,DWDR,BLC,ROI
- IR Range up to 100ft
- True Day / Night
- Vandal Resistant

Dimension(mm)

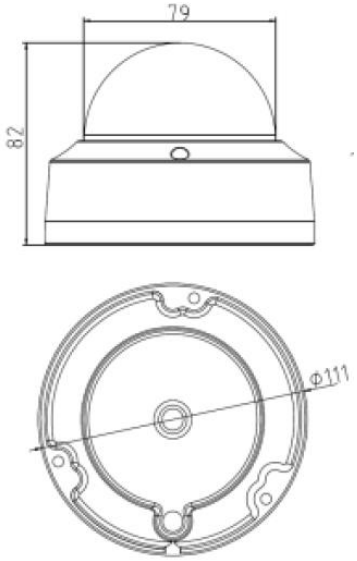

MODEL	NUVIS 25VS
Camera	
Image Sensor	1/2.8" Progressive Scan CMOS
Minimum Illumination	0.01 lux @F1.2, AGC ON, 0 lux with IR
Shutter Time	1/3s ~ 1/100,000s
Lens	2.8mm(F1.6), Hor 115°, Ver62°, Dia 135° 4mm(F1.6), Hor 86°, Ver 47°, Dia 103°
Optical Filter	Mechanically Switching IR Filter
Noise Reduction	3D DNR
WDR	120dB WDR(Wide Dynamic Range)
Internal Storage	Micro SD/SDHC/SDXC slot(Max 128GB)
Video Compression	H.265(+), H.264(+), MJPEG
Bit Rate	32 Kbps~8Mbps
Image	
Max Resolution	1920x1080
Main Stream	30fps (1920x1080,1280x960,1280x720)
Sub Stream	30fps(704x480,640x480, 352x240)
Image Enhancement	BLC/3D DNR/ROI
Image Setting	Rotate, saturation, brightness, contrast
Network	
Smart Feature	Line crossing detection, intrusion detection
Alarm Trigger	Motion detection, tampering alarm, network disconnect, IP conflict, storage exception
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, UPnP, ICMP,IGMP,SNMP, FTP, QoS, HTTPS
Compatibility	ONVIF(Profile S&G), PSIA, CGI
General Functionalities (Security)	One-key reset, Anti-Flicker, heartbeat, mirror, password protection, privacy mask, Watermark, IP address filtering
Network Interface	1 RJ45, 10 M/100 M Ethernet port
General	
Power Supply	12 V DC ± 25%; PoE (802.3af Class 3)
Power Consumption	Max. 5W (7.5W with IR on)
Operating Temperature	-30°C ~ 60°C (-22°F ~ 140°F) humidity 95% or less (non-condensing)
Impact Protection	exceeding IK10
IR Range	Up to 100ft
Dimensions	4.4" (Φ) × 3.3" (H)
Weight	1.3 lb
Weather Proof	IP67
Reset button	Yes