
2 Mega Pixel IP Bullet Camera

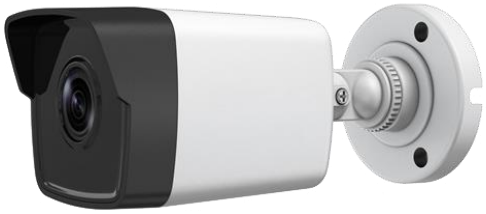

Features

- 2 megapixel@30fps
- H.265(+)
- 3D DNR,DWDR
- IP67 Rating
- IR Range up to 100ft
- True Day / Night

MODEL	NUVIS 25W(2.8mm)
Camera	
Image Sensor	1/2.8" Progressive Scan CMOS
Minimum Illumination	0.01 lux @F1.2, AGC ON, 0 lux with IR
Shutter Time	1/3s ~ 1/100,000s
Lens	2.8mm@F2.0 Hor:103°, Ver 59°, Diag : 118°
Lens Mount	M12
Optical Filter	Mechanically Switching IR Filter
Noise Reduction	3D DNR
WDR	Digital WDR
Region of interest	1 fixed region for main/sub stream
Camera Features	
H.265	H.265(+), Main Profile
H.264	H.264(+), Baseline/Main/High Profile
Bit Rate	32 Kbps~8Mbps
Image	
Max Resolution	1920x1080
Frame Rate	30 fps (1920x1080)
Image Settings	Saturation, brightness, contrast adjustable
BLC	Yes, zone configurable
Network	
Network Storage	NAS
Alarm Trigger	Motion detection, tampering alarm, network disconnect, IP address conflict, storage exception
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6 UDP, Bonjour
Compatibility	ONVIF(Profile S&G), ISAPI
General Functionalities (Security)	dual stream, heartbeat, mirror, password pr otection, privacy mask, watermark, IP addre ss filtering, Anonymous access
Network Interface	1 RJ45, 10 M/100 M Ethernet port
General	
Power Supply	12 V DC ± 25%; PoE (802.3af, 36-57V)
Power Consumption	Max. 5W (7W with IR on)
Operating Temperature	-30°C ~ 50°C (-22°F ~ 122°F) humidity 95% or less (non-condensing)
IR Range	Up to 100ft
Dimensions	2.8“(W) x 2.5“(H) x 7“(D)
Weight	1.1lb
Weather Proof	IP67