Nuvis-510XW LPR setting

Taping CDS sensor

Use blue electric tape to cover CDS sensor to switch camera to night mode at evening. If camera stay on color at night due to street light, licnese plate will not be readable at night. Here is the instruction video link.
https://www.youtube.com/watch?v=k_VQcGTDp9s




Open front cover with tool that comes with camera




Cover the CDS sensor with blue electric tape and close cover.

Nuvis-510XW LPR setting


Camera/Image Setting

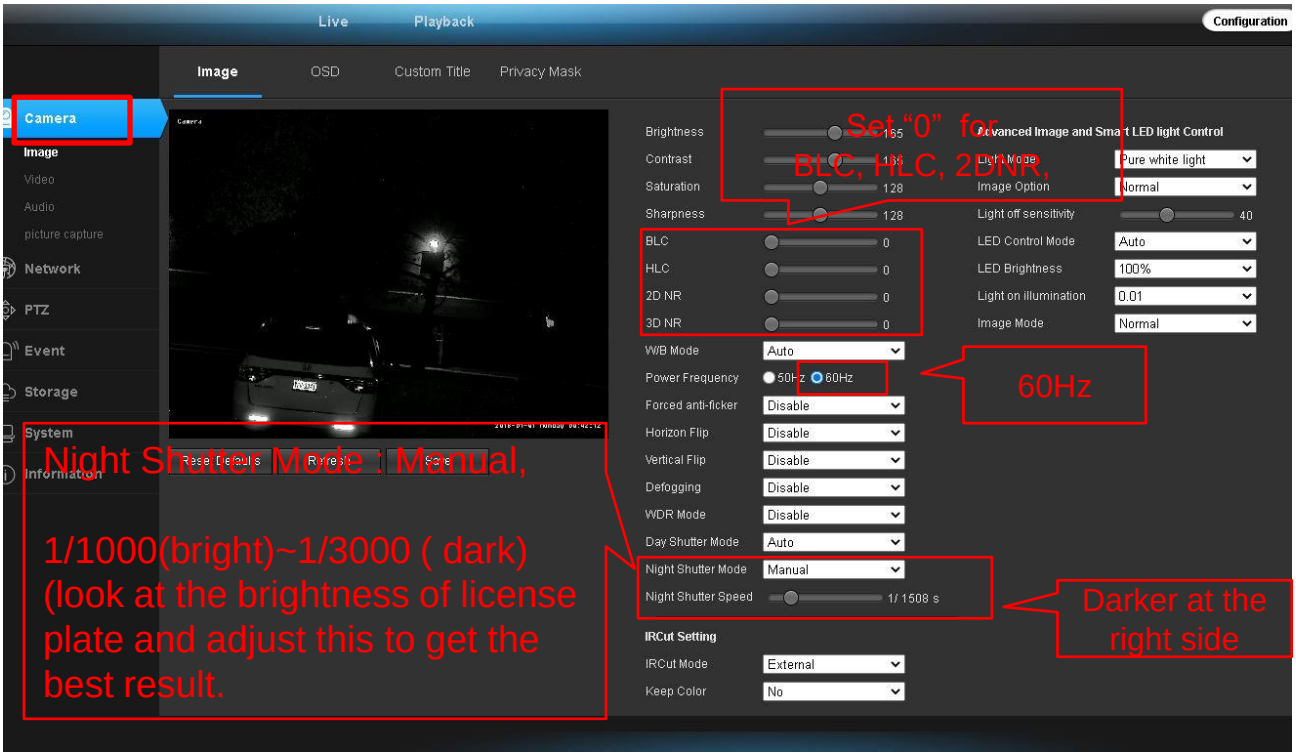

Camera/Video Setting

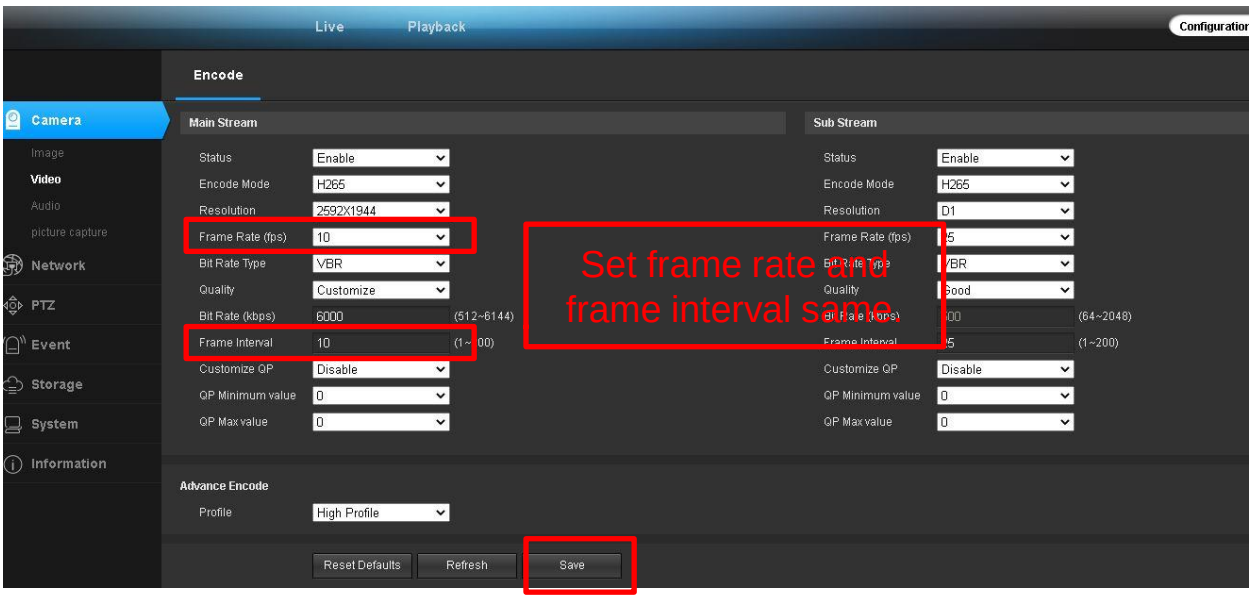

Boot Action Setting

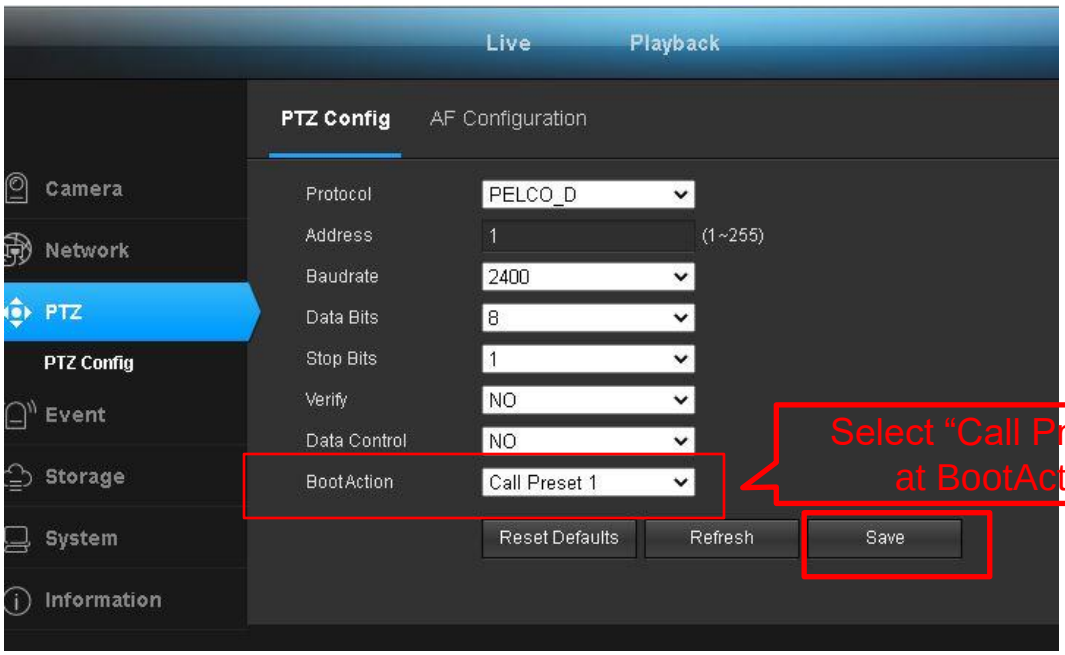

Preset 1 setting



<How to connect camera to Nuvis NVR>

Default IP: 192.168.0.4,ID: admin , Password: 123456
<If you lose password, you need to contact us to reset it. keep your password safe.>
-You can find and set IP,gateway, subnet mask and Port via SADP tool.
-register camera IP address & password to NVR and using hikivison protocol
-this camera is compatible with Nuvis NVR features such as PTZ, virtual server, camera name, motion setup, video stream setup, alarm except plug and play.



If you don’t have object to focus at night, move camera to close traffic sign to find best image setting and move it back to target area.