8K, 64ch NVR, 8HDD Bay




Features

- 64ch IP camera Input
- 2 ea Gigabit Port
- Up to 32 Megapixels Resolution Recording
- 10 ch @ 8MP decode capacity
- HDMI output up to 8K
- HDMI1/VGA1, HDMI2,VGA2
- 8 SATA HDD, RAID

Rear Panel

1. eSATA
2. LAN
3. Audio in and out
4. Audio out and video out
5. HDMI 1 and HDMI 2
6. VGA 1 and VGA 2
7. RS-232 Serial
8. USB 3.0
9. Alarm in, Alarm out, RS-485
10. GND
11. 100 to 240 VAC power supply

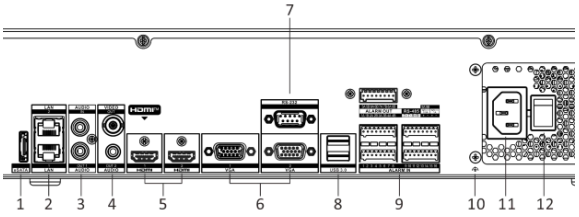

MODEL	Nuvis NVR9664-I8-8K
IP Video input	64 ch
Two-way Audio	1-ch RCA(2.0Vp-p, 1kΩ)
Video/Audio output	
Recording resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF
HDMI1	Max.8K Res., 64ch View, simulation
HDMI2	Max.4K Res., 32ch View, simulation (when HDMI1 is 8K, HDMI2 is 1080p max)
VGA1	Max 1920x1080,simulation of HDMI1
VGA2	Max 1920x1080,simulation of HDMI2
Audio output	2-ch, RCA (2.0Vp-p, 1KΩ)
Recording resolution	32 MP/24 MP/12 MP/8 MP/7 MP/6 MP/5 MP/4MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Decode Capacity	2ch@32 MP(30fps),10ch@8MP(30fps) 20ch@4MP(30fps)/40ch@1080p (30 fps)
Hard disk	
SATA	Up to 8 SATA interfaces(20TB Max Each)
RAID	RAID0, RAID1, RAID5, RAID10
e-SATA	1 eSATA
External Interface	
Network interface	2ea x RJ-45 10 /100 /1000 Mbps
Input	400 Mbps
Output	400 Mbps
Serial interface	1 RS-232, 1 RS-485
USB interface	2 x USB 2.0 at front, 2 x USB3.0 at rear
Alarm Input	16ch
Alarm Output	4ch
General	
Power Supply	100~240VAC, 6.3A, 50~60Hz
Power Consumption	≤ 30 W (without hard disk or DVD-R/W)
Working Temperature	14 °F ~ 131 °F
Working humidity	10%~90%
Chassis	19-inch rack mounted 2U chassis
Dimensions	17.5 × 18.5 × 3.5″
Weight	22 lb
CMS/Web/Smart Phone	
CMS	iVMS
Web	16ch View/16ch Playback
Smart Phone Apps	Guarding Expert (iphone, android) Guarding Expert HD(iPad)
DDNS	Free DDNS service