
32ch 8MP TVI/CVI/AHD/CVBS/IP DVR 1.5U



Features

- •H.265(+)/H.264(+) video compression
- •HD TVI/CVI/AHD/CVBS/IP Hybrid
- •8MP TVI/IP Camera
- •4K HDMI
- •2 HDMI, 1 VGA, 1 CVBS out
- •POS support

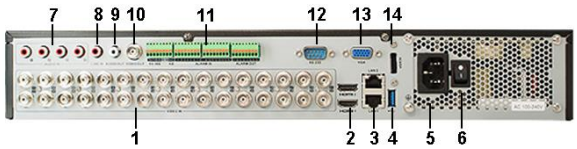

Rear Panel

1. Video in
2. HDMI 1, 2
3. LAN 1, 2
4. USB Port
5. 100~240V AC Power Input
6. Power Switch
7. AUDIO IN, RCA
8. 2 Way Audio in, RCA
9. 2 Way Audio out, RCA
10. CVBS(BNC) Out
11. RS-485, Keyboad, Alarm In/Out
12. RS-232 Serial Port
13. VGA Interface
14. eSATA Interface

MODEL	NUVIS TVK2432
Video / Audio input	
Video Compression	H.265(+)/H.264(+)
Video Input	32ch BNC (HD TVI/AHD/CVI/CVBS)
HD TVI Input	8MP@12fps, 5MP@20fps, 4MP,3MP,1080P,720P@30fps
AHD Input	5MP, 4MP, 3MP 1080P, 720P
CVI Input	4MP, 1080P, 720P
CVBS input	1ch BNC, Independent
IP Video input	16ch(Max.8MP), Total 48ch
Audio Input	4 ch, RCA
Two-way audio	1ch, RCA
Video/Audio output	
HDMI1 / VGA Output	1920x1080 : independent
HDMI2 Output	4K, 1080P: independent
CVBS Output	1ch BNC, 704x480 Resolution, Independent
Encoding resolution (Main Stream)	8MP@8fps,5MP@12fps,3MP@18fps 1080P,720P,VGA, WD1,4CIF@30fps
Encoding resolution (Sub Stream)	WD1, 4CIF@12fps, CIF@30fps
Video Bit Rate	32 Kbps ~ 10 Mbps
Stream Type	Video/Video&Audio
Audio Output	1-ch, RCA (Linear, 1KΩ)
Audio Bit Rate	64kbps
Synchro Playback	16ch
Dual Stream	Yes
Remote connections	128
Hard Disk	
Capacity	Up to 8TB capacity for each Disk
SATA	4 SATA interface
External Interface	
Network Interface	2 RJ45 10M/100M/1000M
USB Interface	2 USB2.0(front) , 1 USB3.0(rear)
Serial Interface	1 RS-485 interface
Alarm In/Out	16/4
POS	Network(12ch), RS232
General	
Power Supply	100 ~ 240VAC, 47 ~ 63HZ
Consumption	<74W
Working Temperature	-10 ºC ~+55 ºC (14 ºF ~ 131 ºF)
Working Humidity	10%~90%
Chassis	19-inch rack-mounted 1.5U chassis
Dimension	445 × 390 × 70 mm (17.5 × 15.3 × 2.7 inch)
Weight	≤5Kg (11.0lb)
CMS/Web/Smart Phone	
CMS	iVMS
Web	Live View/Remote Play Back/Remote Setup
Smart Phone Apps	Guarding Expert (iphone, android)
DDNS	Free DDNS service