
5MP Sony Stavis Low Light
5MP TVI/AHD/CVI/CVBS IR Turret camera





Features
- Sony Stavis Low Light Sensor
- 5MP
- 4 in1 (TVI/AHD/CVI/CVBS)
- True Day/Night
- 2.8 mm or 3.6mm 5 MegaPixel Lens
- 18 SMD IR LEDs (100ft)
- DNR, DWDR
- IP66 weatherproof

<Di

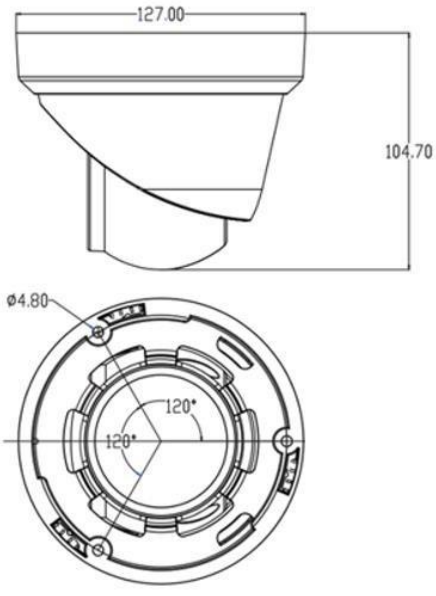

MODEL	Star-5T
Camera	
Image Sensor	**Sony Stavis Low Light Sensor** 5MP 1/2.8" CMOS
Effective Pixels	2608(H)×1960(V)
Min. Illumination	0.01 Lux(0Lux IR on)
Scanning System	Progressive Scan
Shutter Time	1/60 s to 1/60,000 s
IR LED	18x SMD IR LEDs, working distance: 100 ft
Lens	2.8mm or 3.6mm
Angle of view	Horizontal 110°(2.8mm), 88°(3.6mm)
Lens Mount	M12
Angle Adjustment	Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360°
Day & Night Mode	External, Auto, Color, Mono
Wide dynamic range	DWDR
Synchronization	Internal synchronization
Video Resolution& Frame Rate	TVI/AHD:5MP@20fps, 4MP,2MP@30fps CVI :4MP@30, 2MP@30fps CVBS:960H
Video Output	1 BNC (TVI/AHD/CVI/CVBS), dip switch
S/N Ratio	48dB (min) (ACG closed)
OSD menu	UTC
Menu	
Noise Reduction	DNR
Auto White Balance	AUTO/Manual
AE Mode	Globe/BLC/FLC
AGC	AUTO
GENERAL	
Dimension	¢ 5 inches x 4.5 inches(H)
Power Source	DC12V 600mA
3 Axis	3 Axis Mount
Hanger	Bottom of dome is Hanger for easy install
Operation Temperature	-10℃ ~ +50℃ RH95% Max
Weight	1.3lb