

# 5MP Sony Stavis Low Light
## 5MP TVI/AHD/CVI/CVBS, Auto Focus, IR Bullet

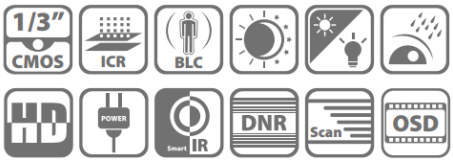


### Features

- •Sony Stavis Low Light Sensor
- • 5MP
- • 4 in1 (TVI/AHD/CVI/CVBS)
- • True Day/Night
- • Auto Focus 2.7~13.5mm lens
- • 4 Array IRs (180ft)
- • WDR
- • IP66 weatherproof

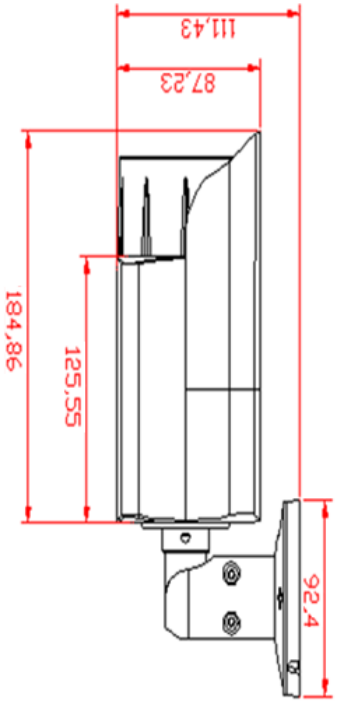


| MODEL | Star-512WAFL |
|---|---|
| **Camera** | |
| Image Sensor | **Sony Stavis Low Light Sensor** 5MP 1/2.8'' CMOS |
| Effective Pixels | 2608(H)×1960(V) |
| Min. Illumination | 0.01 Lux(0Lux IR on) |
| Scanning System | Progressive Scan |
| Shutter Time | 1/60 s to 1/60,000 s |
| IR LED | 4 Array IRs, working distance: 180ft |
| Lens | Auto Focus 2.7 -13.5 mm Mega Pixel lens |
| Angle of view | 104~36° |
| Lens Mount | M12 |
| Angle Adjustment | Pan: 0 - 360°, Tilt: 0 - 90°, Rotation: 0 - 360° |
| Day & Night Mode | External, Auto, Color, Mono |
| Wide dynamic range | WDR, 120dB |
| Synchronization | Internal synchronization |
| Video Resolution& Frame Rate | TVI/AHD:5MP@20fps, 4MP,2MP@30fps<br>CVI :4MP@30, 2MP@30fps<br>CVBS:960H |
| Video Output | 1 BNC (TVI/AHD/CVI/CVBS dip switch) |
| S/N Ratio | 48dB (min) (ACG closed) |
| OSD menu | UTC |
| **Menu** | |
| Noise Reduction | 3 DNR, 2 DNR |
| Auto White Balance | AUTO/Manual |
| AGC | AUTO |
| **GENERAL** | |
| Dimension | 12"(W) x 3.5"(H) x 3.5"(D) |
| Power Source | DC12V 900mA |
| Bracket | 3 Axis , Cable through |
| Operation Temperature | -10℃ ~ +50℃ RH95% Max |
| Weight | 3.1lb |